


Road & Off-Road CHAINS



PROGRAM



WRP CHAIN SPECS CHART											
WRP CHAIN	LINKS)		TENSILE STRENGTH		SEAL RING	p	w	r	s	t	l
	Kg	Lbs	N	Lbs		PITCH	INNER WIDTH	ROLLER DIAM.	PLATE THICKNESS	PIN LENGTH	
520 HZR	1,62	3,57	34.800	7,823	Z	15,875	6,35	10,23	2,00	2,00	20,5
525 HZR	1,86	4,09	35.800	8.048	Z	15,875	7,95	10,23	2,20	2,20	23,0
530 HZR	2,22	4,90	40.800	9	Z	15,875	9,53	10,23	2,40	2,40	25,4


WRP CHAIN APPLICATION CHART													
WRP CHAIN	TOURING						SPORT						
	125	250	350	550	650	900	500	600	800	900	1000	1300	
520 HZR	•	•	•	•	•	•	•	•	•	•	•	•	
525 HZR				•	•	•		•	•	•	•	•	
530 HZR					•	•		•	•	•	•	•	•

WRP CHAIN CONVERSION CHART				
WRP CHAIN	P/N CONVERSION			
	DID	EK	REGINA	RK
520 HZR	520 VX3	520 DEX	135 ZRT	520 XSO / XRE
525 HZR	525 VX3	525 DEX	137 ZRT	525 XSO / XRE
530 HZR	530 VX3	530 DEX	136 ZRT	530 XSOZ1 / XRE




Z-RING CHAINS

- HIGH PERFORMANCE LIGHTWEIGHT CHAIN WITH SUPERIOR STRENGTH AND EXCELLENT WEAR RESISTANCE
- SPECIAL-DESIGNED CONICAL SHAPE ON THE INNER SIDE
- THE ASSEMBLED Z-RING'S INHERENT FLEXIBILITY PROVIDES A SPRING FORCE, GUARANTEEING LONG-TERM SEAL PERFORMANCE
- THE CONICAL SECTION ENHANCES THE ASSEMBLING ON THE BUSHING
- THE LUBRICANT TRAPPED BETWEEN THE PLATES AND THE LOBES KEEPS THE RING LUBRICATED AND INCREASES THE CHAIN LIFE
- ASSEMBLED WITH HIGH ALLOY STEEL PINS AND PLATES, SOLID BUSHINGS AND ROLLERS, SHOT-PEENED PLATES, PINS AND ROLLERS
- SUBMITTED TO PERFORMANCE-ENHANCING PRE-STRETCHING

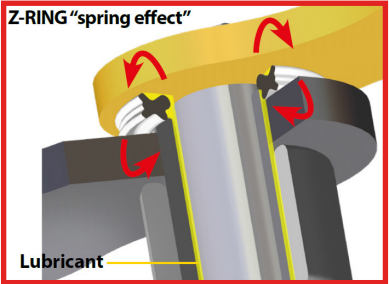

SPORTBIKE & STREET CHAINS		
DESCRIPTION	N. LINKS	P/N
520 HZR		
PRE-CUT Z-RING CHAIN	120	WEC520HZR-120
RIVET CONNECTING LINK	1	WEC520HZR-RCL
525 HZR		
PRE-CUT Z-RING CHAIN	120	WEC525HZR-120
RIVET CONNECTING LINK	1	WEC525HZR-RCL
530 HZR		
PRE-CUT Z-RING CHAIN	120	WEC530HZR-120
RIVET CONNECTING LINK	1	WEC530HZR-RCL

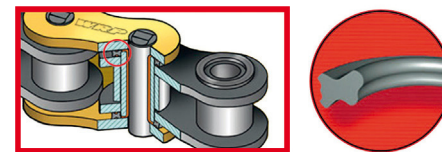

OFF-ROAD CHAINS

DESCRIPTION	N. LINKS	P/N
428 PMX		
PRE-CUT CHAIN	130	WE428PMX-130
SPRING CONNECTING LINK	1	WE428PMX-SCL
520 PMX		
PRE-CUT CHAIN	120	WE520PMX-120
SPRING CONNECTING LINK	1	WE520PMX-SCL
520 LZE		
PRE-CUT Z-RING CHAIN	120	WE520LZE-120
SPRING CONNECTING LINK	1	WE520LZE-SCL

OFF-ROAD CHAINS


- HIGH PERFORMANCE LIGHTWEIGHT CHAIN WITH SUPERIOR STRENGTH AND EXCELLENT WEAR RESISTANCE
- MANUFACTURED FROM SPECIAL HEAT-TREATED STEEL
- GOLD OUTER FINISH AND CHROMED BEARING PINS TO RESIST CORROSION AND TO EXTEND CHAIN LIFE

"LZE" / Z-RING CHAINS

- CHAIN DESIGNED FOR ENDURO, MX AND ATV
- LOW FRICTION Z-RINGS OIL SEAL FOR MAXIMUM PERFORMANCE AND DURABILITY

"PMX" / NON O-RING CHAINS

- DESIGNED EXCLUSIVELY FOR MOTOCROSS RACING USE
- AVAILABLE IN 428 AND 520 SIZES PROVIDING CLASS LEADING PERFORMANCE

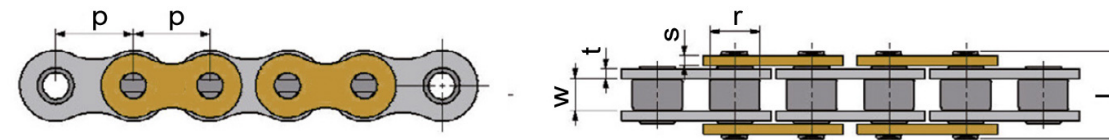

WRP CHAIN SPECS CHART

WRP CHAIN	LINKS		TENSILE STRENGTH		SEAL RING	p	w	r	s	t	l
	Kg	Lbs	N	Lbs		PITCH	INNER WIDTH	ROLLER DIAM.	PLATE THICKNESS	PIN LENGTH	
428 PMX	1,03	2,26	23.000	5.171	-	12,7	7,75	8,51	1,80	1,80	18,8
520 PMX	1,56	3,43	34.000	7.644	-	15,875	6,35	10,16	2,00	2,00	18,1
520 LZE	1,52	3,36	33.800	7.598	Z	15,875	6,35	10,23	2,00	2,00	18,6

WRP CHAIN APPLICATION CHART

WRP CHAIN	MOTOCROSS				ENDURO / ATV					TRIAL		
	50	125	250	500	50	85	125	250	500	50	125	350
428 PMX	•	•	•	•	•	•	•	•	•	•	•	•
520 PMX	•	•	•	•	•	•	•	•	•	•	•	•
520 LZE	•	•	•	•	•	•	•	•	•	•	•	•

WRP CHAIN CONVERSION CHART

WRP CHAIN	P/N CONVERSION				
	DID	EK	REGINA	RK	RENTHAL
428 PMX	428 NZ	428 SHDR	126 RX3	428 MXZ4	428 R1
520 PMX	520 ERT3	520 MRD7	135 RX3	520 MXZ4	520 R1
520 LZR	520 ERVT / VT2	520 RXO / SM	135 ZSE	520 MXU	





Luca Lunetta



Celestino Vietti



Daniela Guillen



Levi Kitchen



Nicolai Skovbjerg



@WRP.WorksRacingParts



@wrpracing_official



@wrp-works-racing-parts



wrpracing.com

Wind Trading s.r.l.
via Dismano 114/g
48124 Ravenna, Italy
windtrading@windtrading.it